LIGHT COMMERCIAL GRADE CONDENSATE PUMPS Model PABX

BENEFITS:

- Four-quart heavy duty ABS plastic reservoir
- Auxiliary safety switch

Three inlets: 1-1/8" and 1-3/8" top inlets 3/4" FNPT alternate inlet at base

The PABX is Hartell's light commercial condensate pump, rounding out our commercial condensate line. It is the ideal pump for applications requiring higher lift and greater capacity than standard residential condensate pumps. The PABX has an integral full-flow check valve and a high torque motor. A safety auxiliary switch and three inlets including an alternate inlet at the base come standard in this model.

FEATURES:


- Suitable for gas condensing furnace applications
- 22-foot maximum lift
- Factory installed full-flow check valve
- 6-foot power cord and molded plug
- Maximum temperature 110°

| Model | Part No. | Voltage | HP@RPM | Performance | | | | | Max. Lift | Dimensions | | | |
|----------|----------|------------|-----------|-------------|-------|-------|-------|--------|-----------|------------|-----------|---------|---------|
| WOUEI | | | | | | | | | | Width | Length | Height | Weight |
| PABX-115 | 801321 | | | Lift/Feet | 6' | 12' | 18' | 20' | 22' | 9.25" | 6.0" | 9.75" | 6 lbs |
| | | 115V | 1/20 @ | Gallons/Hr | 155 | 135 | 90 | 68 | | | | | |
| | | 1.6A | 3,000 | Lift/Meters | 1.82m | 3.65m | 5.48m | 6.09m | 6.70m | 23.50cm | 15.24cm | 24.77cm | 2.72 kg |
| | | | | Liters/hr | 586 | 511 | 340 | 75 | 0.7011 | | | | |
| PABX-230 | 801322 | | 1/25@ | Lift/Feet | 6' | 12' | 18' | 20' | 22' | 9.25" | 6.0" | 9.75" | 6 lbs |
| | | 230V | | Gallons/Hr | 155 | 135 | 90 | 68 | | | | | |
| | | .84A 3,000 | 3,000 | Lift/Meters | 1.82m | 3.65m | 5.48m | 6.09m | 6.70m | 23.50cm | 15.24cm | 24 77om | 2.72 ka |
| | | | Liters/Hr | 586 | 511 | 340 | 75 | 0.7011 | 23.300111 | 15.246111 | 24.776111 | 2.72 KY | |



DATA SHEET

www.hartell.com • info@hartell.com

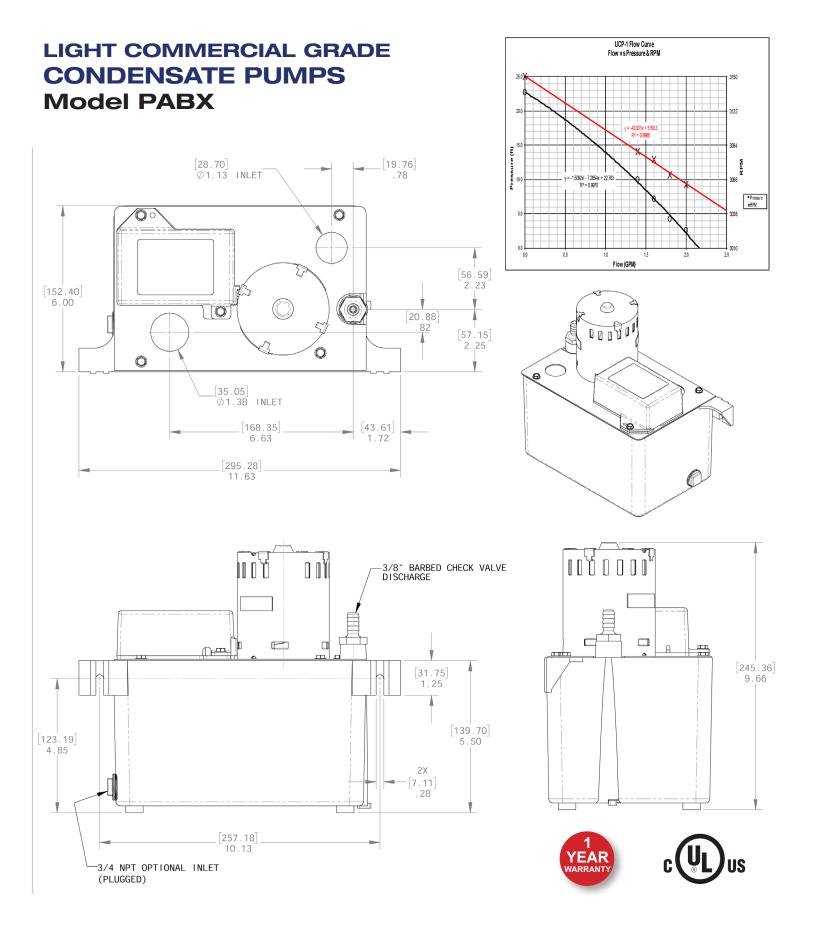

www.hartell.com • info@hartell.com

Literature #950013 2019