High Volume Commercial Grade Condensate Pumps

Model L4 Series Pumps

BENEFITS

- Maximum lift 45 feet, Maximum flow: 4,200 GPH
- Heavy duty design for industrial applications
- Fits under utility sinks
- Stainless steel float
- Max temperature to 150°

The L4 commercial grade condensate pump series is designed for pumping large quantities of water. Used in commercial and industrial air conditioning systems, large refrigeration units, and multiple unit installations to tie several drains into one disposal pump.

FEATURES

- 2 gallon cast aluminum reservoir
- 1/2 hp motor, 3,450 rpm
- Inlet: 1-1/2" FNPT; Outlet: 1" FNPT
- Integral junction box
- Dual voltage motor
- Unitized construction







	Model	Part No.	Aux. Switch	hp@rpm	Voltage	Full Load Amps	Performance						Shut off	Dimensions			
ſ	L4-115/230	851047	N	1/2 @ 3450	115/230	7.46/3.7	Lift/Feet	6'	12'	18'	24'	36'	45'	Width	Length	Height	Weight
١	L4-113/230	031047	IN				Gallons/hr	4200	3780	3420	2820	1800	-	10" 25.4cm	8" 20.3cm	17" 43.1cm	34lbs 15.4kg
L4	_4X-115/230	851119	Y				Lift/Meter	1.8m	3.6m	5.5m	7.3m	10.9m	13.7m				
							Liters/hr	15898	14308	12946	10674	6813	-				





High Volume Commercial Grade Condensate Pumps


Model L4 Series Pumps








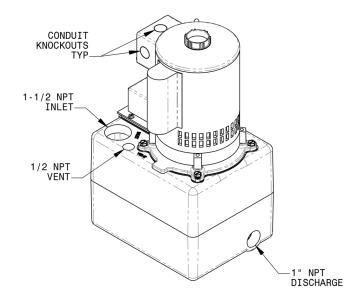





DISCHARGE END VIEW

SIDE VIEW

